




2.5 ABSPERRVENTIL MIT SCHWEISSANSCHLÜSSEN – EDELSTAHL – SERIE 881 [SHUTOFF VALVE WITH WELDING CONNECTIONS – STAINLESS STEEL – SERIES 881]

✓ 100% He tested


✓ Made in Germany



RoHS
conform

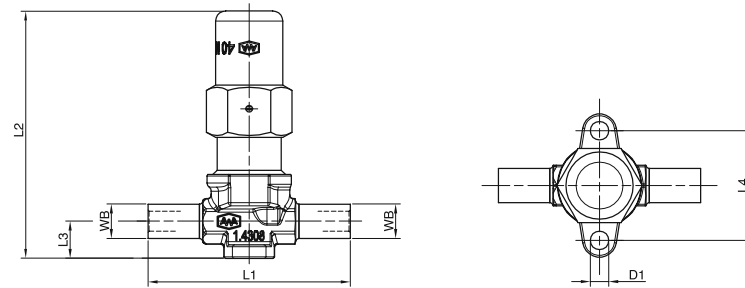




Edelstahl [stainless steel]



Part Number	WB mm	DN mm	D ₁ mm	L ₁ mm	L ₂ mm	L ₃ mm	L ₄ mm	Kv m ³ /h
881 001 000	10,2	6	5,5	60	74	11	32,5	0,4
881 003 000	13,5	8	5,5	90	90	19	45	1,4
881 005 000	17,2	10	5,5	90	90	19	45	2,1
881 008 000	21,3	15	6	100	120,5	20	56	3,9
881 010 000	26,9	20	6,5	136	128	24,5	65	6,6

✓ Erweiterter Druckbereich
auf Anfrage
[Extended pressure range
upon request]

2.6 ABSPERRVENTILE MIT SCHWEISS-/ LÖTANSCHLÜSSEN – EDELSTAHL – SERIE 881 [SHUTOFF VALVES WITH WELDING-/ SOLDER CONNECTIONS – STAINLESS STEEL – SERIES 881]

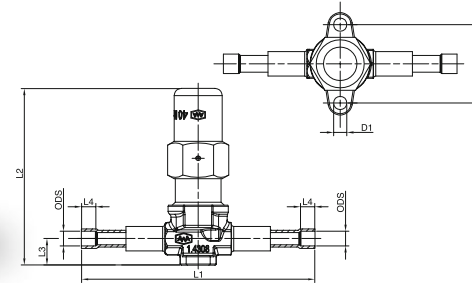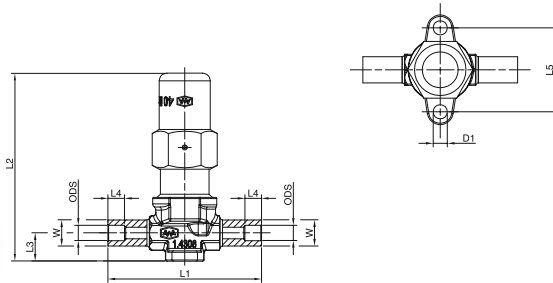

✓ 100% He tested

✓ Made in Germany




RoHS
conform

Part Number	W mm	ODS mm [inch]	D ₁ mm	L ₁ mm	L ₂ mm	L ₃ mm	L ₄ mm	L ₅ mm	Kv m ³ /h
881 101 000	10,2	6	5,5	60	74	11	6,5	32,5	0,4
881 102 000	10,2	[1/4]	5,5	60	74	11	6,5	32,5	0,4
881 103 000	13,5	[3/8]	5,5	90	90	19	10	45	1,4
881 104 000	13,5	10	5,5	90	90	19	10	45	1,4
881 105 000	17,2	12	5,5	90	90	19	10	45	2,1
881 106 000	17,2	[1/2]	5,5	90	90	19	10	45	2,1
881 107 000	20	15	6	100	120,5	20	11	56	3,5
881 108 000	21,3	16 [5/8]	6	100	120,5	20	11	56	3,9
881 109 000	25,4	18	6,5	112	128	24,5	13	65	5,1
881 110 000	25,4	[3/4]	6,5	112	128	24,5	13	65	5,5
881 111 000	30	22	6,5	118	128	24,5	16	65	6,6
881 112 000	30	[7/8]	6,5	118	128	24,5	16	65	6,6

Part Number	ODS mm [inch]	D ₁ mm	L ₁ mm	L ₂ mm	L ₃ mm	L ₄ mm	L ₅ mm	Kv m ³ /h
881 201 000	6	5,5	97	74	11	6	32,5	0,4
881 202 000	[1/4]	5,5	97	74	11	6	32,5	0,4
881 203 000	[3/8]	5,5	120	90	19	9	45	1,4
881 204 000	10	5,5	120	90	19	9	45	1,4
881 205 000	12	5,5	120	90	19	9	45	2,1
881 206 000	[1/2]	5,5	120	90	19	9	45	2,1
881 207 000	15	6	140	120,5	20	11	56	3,7
881 208 000	16 [5/8]	6	140	120,5	20	11	56	3,7
881 209 000	18	6,5	155	128	24,5	13	65	5,1
881 210 000	[3/4]	6,5	155	128	24,5	13	65	5,5
881 211 000	22	6,5	155	128	24,5	16	65	6,6
881 212 000	[7/8]	6,5	155	128	24,5	16	65	6,6

Edelstahl [stainless steel]






✓ Erweiterter Druckbereich
für 881-1 auf Anfrage
[Extended pressure range
for 881-1 upon request]




2.7 ABSPERRVENTILE MIT BÖRDEL-/LÖTANSCHLÜSSEN – EDELSTAHL – SERIE 881 [SHUTOFF VALVES WITH FLARE / SOLDER CONNECTIONS – STAINLESS STEEL – SERIES 881]

✓ 100% He tested

✓ Made in Germany

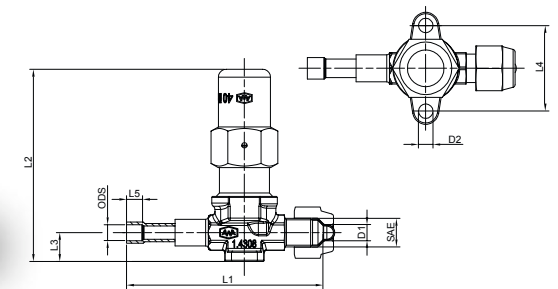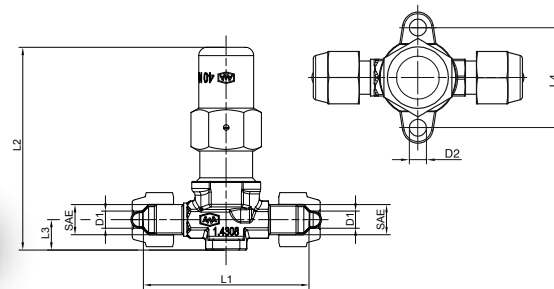

Edelstahl [stainless steel]



Part Number	SAE inch	D1 Tube mm [inch]	D ₂ mm	L ₁ mm	L ₂ mm	L ₃ mm	L ₄ mm	Kv m ³ /h	PS bar
881 301 000	1/4	6	5,5	60	74	11	32,5	0,4	63
881 302 000	1/4	[1/4]	5,5	60	74	11	32,5	0,4	63
881 303 000	3/8	[3/8]	5,5	80	90	19	45	1,4	40
881 304 000	3/8	10	5,5	80	90	19	45	1,4	40
881 305 000	1/2	12	6	110	120,5	20	56	2,2	40
881 306 000	1/2	[1/2]	6	110	120,5	20	56	2,2	40
881 307 000	5/8	15	6	110	120,5	20	56	3,2	40
881 308 000	5/8	16 [5/8]	6	110	120,5	20	56	3,2	40

Part Number	ODS mm [inch]	SAE inch	D1 Tube mm [inch]	D ₂ mm	L ₁ mm	L ₂ mm	L ₃ mm	L ₄ mm	L ₅ mm	Kv m ³ /h	PS bar
881 901 000	6	1/4	6	5,5	72,5	74	11	32,5	6	0,4	63
881 902 000	[1/4]	1/4	[1/4]	5,5	72,5	74	11	32,5	6	0,4	63
881 903 000	[3/8]	3/8	[3/8]	5,5	100	90	19	45	9	1,3	40
881 904 000	10	3/8	10	5,5	100	90	19	45	9	1,3	40