

Solenoid Valves Series 110RB/200RB...-FLR

Technical Data Valve


Max. allowable working pressure PS	31 bar	Max. ambient temperature:	-40...+50°C
Test pressure PT	34.1 bar	Operating Temperature Range TS	-40...+120°C

Technical Data ESC-EX... Coil


Supply voltage ESC EX24VAC ESC EX230VAC	24VAC ±10% 230VAC ±10%	Ambient temperature range	-40...+60°C
Frequency	50 Hz	Marking	 II 3G Ex nA IIA T3 Gc U 
Vibration resistance	0.7g 10 ... 200 Hz		
Protection Class	IP65		

Dimensions (mm)

110RB...-FLR

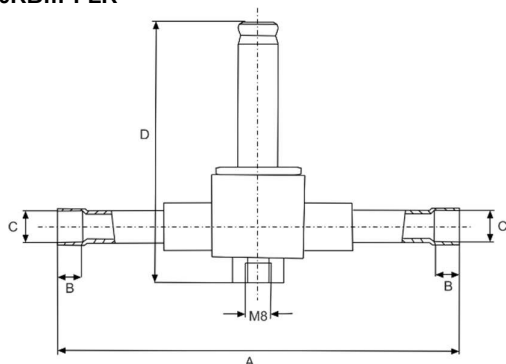

200RB...-FLR

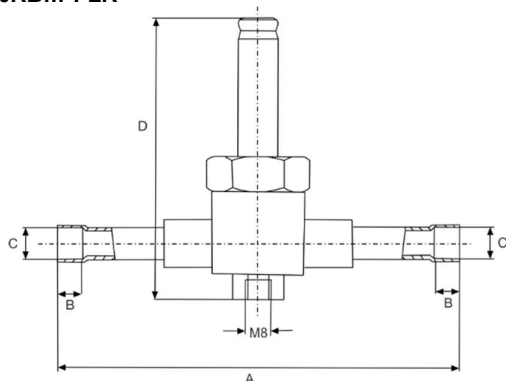

Type	Part No.	(mm)			C	
		A	B	D	Connections Solder / ODF (mm)	(inch)
110RB 2T2-FLR	801465	126	8	77.3	6	
110RB 2T2-FLR	801466		8	77.3		14"
110RB 2T3-FLR	801467		8	77.3	10	
200RB 3T3-FLR (mm)	801323	126	8	88.3	10	
200RB 3T3-FLR	801445		8	88.3		3/8"
200RB 4T10-FLR	801446	126	8	88.3	10	
200RB 4T4-FLR	801447		10	88.3		1/2"
200RB 4T3-FLR	801448		8	88.3		3/8"
200RB 4T12-FLR	801449	126	10	88.3	12	
200RB 6T4-FLR	801450		10	88.3		1/2"
200RB 6T12-FLR	801451		10	88.3	12	
200RB 6T5-FLR	801452		13	88.3	16	5/8"

ESC-EX24VAC / ESC-EX230VAC-ATEX

